

RAIL 50x40 et 62x55

End Post

VITICULTURE




SLPA

INDUSTRIE & AGROFOURNITURES


End posts with 100mm spacing drilling system




RAIL 50x40





8.3mm holes

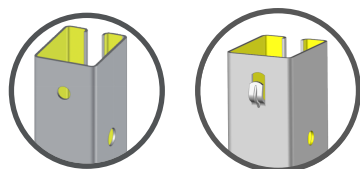

RAIL 62x55



11mm holes

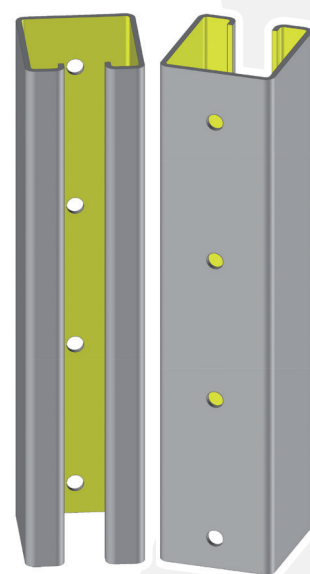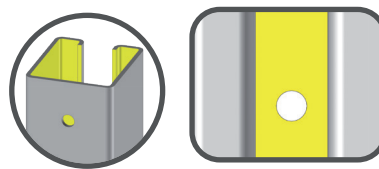

The benefits :

- Robustness suited for low to medium rows lengths
- Equipped with **ø 8.3mm diameter holes** for mooring wires
- Possibility of customizable lateral and rear drilling
- Possibility of using PG-type hooks at the back, spaced at 30mm min.

The benefits :

- High robustness adapted to line lengths
- Space-saving, better harvesting of line ends
- Equipped with **ø 11mm diameter holes** for mooring wires
- Customizable rear drilling
- Recommended for Precision Shaving (see specific TRP documentation)

Create your own product

Length	Min 15m to Max 3m
Material	S250GD or S250GD XCarb™
Coating	Z275 (according to currents standards)
Thickness	2 mm (only)
Packaging	Bundles of 216 units for RAIL 50x40 - By request for RAIL 62x55

Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable





RAIL 50x40 et 62x55

End Post



Recommendations for installation :

Reminder : Recommended maximum interspacing between 2 line posts : 5m

For high acidity soils, ZAM coating is recommended.

Install the end posts with an appropriate angle of approximately 60°.

The recommended installation depth is 1/3 length of the post to guarantee optimal support. Connect the mooring at 2 points on the end post and space it at least 4/5 length of the post to optimize its resistance.

Notes

